


Professional FM Interpretation System

The PRO-T700 is a complete language interpretation system designed for optimum portability and functionality. The system can have two interpreters working per language and is equipped with two headphone jacks with separate volume control for each interpreter and two microphones for seamless segues between interpreters.

The PRO-T700 offers 40 narrow-band and 20 wide-band channels to choose from. Top audio quality is assured by its superior low noise circuitry and sophisticated audio processor. System covers up to 250,000 square feet and capable of broadcasting to over 2,000 people. Combining more than one PRO-T700 system provides the ability to handle multiple languages and utilize the 'RELAY' interpreting function of the system.

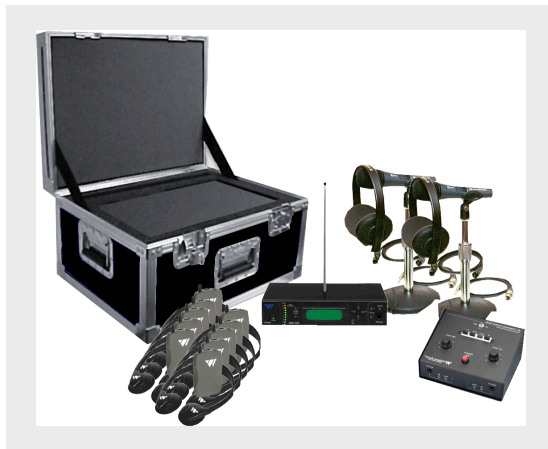

Price \$3,799.00

PRO-T700 SYSTEM COMPONENTS

Monitoring

- 1-IC-1 Interpreter Console
- 2-HD202 Headphones

Transmission

- 2-e835 Professional Microphones
- 1-T35 Large Area Transmitter

Receivers

- 10-R35 One Channel Receivers
- 10-HED021 Executive Headsets

Accessories

- 1-TPL-282 ATA Style Carrying Case
- 2-XLR/XLR Connecting Cables

Interpreter Booths (may be added at additional cost)


- LB12 Tabletop Interpretation Booth
- (70" X 35" X 35" - 70 lbs.)

Multiple Language

- Upgrade to Eight Channel Receivers
- M367 Mixer
- F16a Distribution Amplifier Mic/Line selectable
- XLR25 25 foot cable

Size and Dimensions	
Receiver Channels:	Four (1 & 8 channel available)
Transmitter Channels:	60 (selectable to any one)
Packed Dimensions:	24" X 12" X 8"
Weight:	30 lbs.
Operating Freq:	72-76 MHz
Range:	0-1,000 feet radius (320m)

Technical Data	
Receiver Color:	Charcoal Grey
Dimensions:	3.5" X 4" X 0.6" - Wt. 3.5 oz.
Operating Freq:	72-79 MHz (0.025 Hz)
Earphone:	1/8" Mono Jack
Controls:	Volume, Channel Selector
Power Source:	2xAA 1.5V Battery
Battery Life:	18-35 hours (Alkaline)
Transmitter Color:	Black
Transmitter Channels:	60 (selectable to any one)
Range:	0-1,000 feet radius (320m)
Audio Output:	Line Level (1/4")
Audio Input:	Mic/Line Level (XLR or 1/4")
Power Source:	120VAC Adapter (220V available)
Monitoring Unit:	Black
Dimensions:	3.5" X 3.5" X 2.5" Wt. 0.5 lbs.
Controls:	Independent Volume Controls (2), Mute/Cough, Relay, Key, Norm
Audio Input/Output:	Mic (1/4" & 1/8"), Line Level (XLR)
Connections:	XLR Line In, 1/4" & 1/8" Mic In
	Headphone Jacks (x2) 1/8"
Power Source:	120VAC Adapter (220V available)

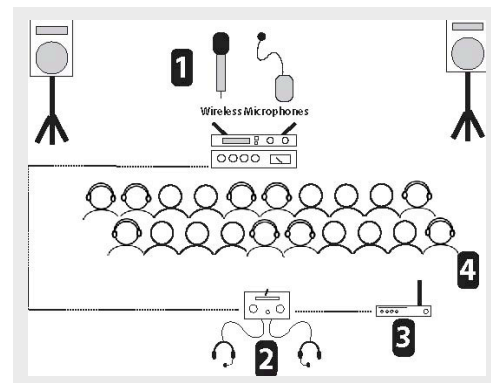

1- Presentation, 2- Monitoring, 3- Transmission, 4- Reception