

Professional FM 863 MHz Interpretation System

The PRO-T900E is a complete language interpretation system designed for optimum portability and functionality for non-US markets. The system can have two interpreters working per language and is equipped separate volume control, two microphones, and two headphones for the interpreters and a microphone selector for seamless segues between interpreters.

The PRO-T900E offers 20 narrow-band and 10 wide-band channels to choose from. Top audio quality is assured by its superior low noise circuitry a sophisticated audio processor. System covers up to 250,000 square feet and capable of broadcasting to over 5,000 people. Combining more than one PRO-T900E system provides the ability to handle multiple languages and utilize the 'RELAY' interpreting function of the system.



Price \$3,799.00

PRO-T900 SYSTEM COMPONENTS

Monitoring

- 1-IC-2 Interpreter Console
- 2-HD202 Headphones

Transmission

- 2-e835 Professional Microphones
- 1-T800 Large Area Transmitter

Receivers

- 10-R8863 Three Channel Receivers
- 10-HED021 Executive Headsets

Accessories

- 1- 2015 Wheeled Carrying Case w/Retracting Handle
- 2-XLR/XLR Connecting Cables

Interpreter Booths (may be added at additional cost)


- LB12 Tabletop Interpretation Booth
- (70" X 35" X 35" - 70 lbs.)

Multiple Languages

- Add Mixer
- Add Distribution Amplifier Mic/Line selectable
- Add IC-1 with Headsets and Microphones
- Add required number XLR cables

Size and Dimensions	
Receiver Channels:	Three
Transmitter Channels:	40 (selectable to any one)
Packed Dimensions:	18" X 16" X 8"
Weight:	22 lbs.
Operating Freq:	863 MHz
Range:	0-1,000 feet radius (320m)
Technical Data	
Receiver Color:	Black
Dimensions:	3.5" X 4" X 0.6" - Wt. 3.5 oz.
Operating Freq:	863 MHz
Earphone:	1/8" Mono Jack
Controls:	Volume, Channel Selector
Power Source:	2xAA 1.5V Battery
Battery Life:	35-60 hours (Alkaline)
Transmitter Color:	Black
Transmitter Channels:	3
Range:	0-1,000 feet radius (320m)
Audio Output:	Line Level (XLR) Line level RCA
Audio Input:	Mic/Line Level (XLR or RC A)
Power Source:	120-240VAC Adapter
Interpreter Unit:	Black
Dimensions:	6" X 4.5" X 5.5" Wt. 0.5 lbs.
Controls:	Independent Volume Controls (2), Mute/Cough, Relay, Key, Norm
Audio Input/Output:	Mic (1/4" & 1/8"), Line Level (XLR)
Connections:	XLR Line In, 1/4" & 1/8" Mic In
	Headphone Jacks (x2) 1/8"
Power Source:	120VAC Adapter (220V available)

PRO-T900E - 4 Steps to Quality Interpretation (PMTR)

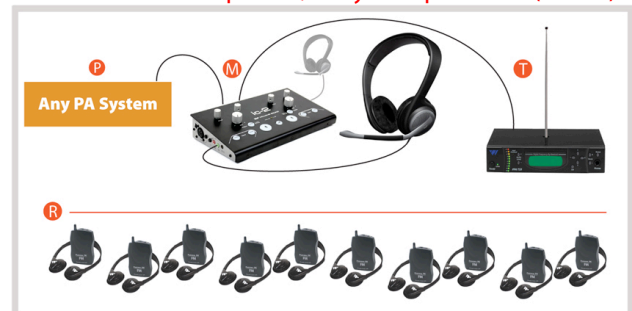

P- Presentation, **M-** Monitoring, **T-** Transmission, **R-** Reception